

renata batteries

Respaldo de calidad suiza

0%
MERCURY



A COMPANY OF THE SWATCH GROUP

PILAS ÓXIDO DE PLATA

EXCELENTE CALIDAD Y GRAN FIABILIDAD

Recomendadas para relojes, dispositivos electrónicos, tecnología médica, etc.



Weinger e Hijos SRL

Distribuidor exclusivo de **renata** en Argentina

www.renata.net

renata batteries

FICHA DE PRODUCTO



315 **0%**
MERCURY

SR716SW (SR67)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	23 mAh, Discharge over 47 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,33 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	1,65 mm (0,065")

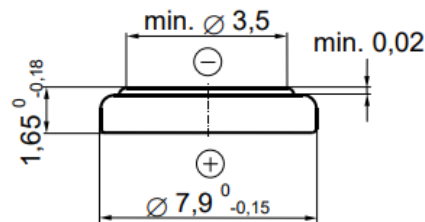

Discharge Curve

Constant Load	47 kΩ
Starting Drain	32,9 μ A
Temperature	20°C

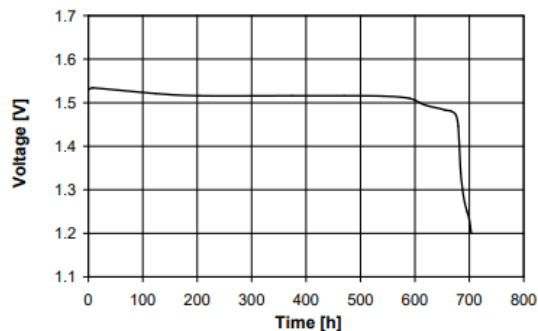

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 315MF_OEM.07 2019/08

Renata SA
CH-4452 Ittingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

317 **0%**
MERCURY

SR516SW (SR62)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	10,5 mAh, Discharge over 121 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,18 g

Dimensions


(according IEC 60086-3)

Diameter	5,80 mm (0,228")
Height	1,65 mm (0,065")

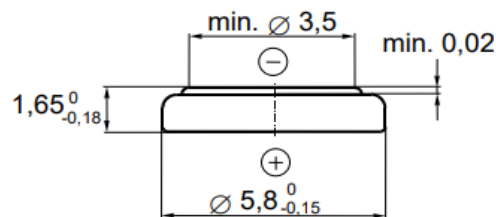

Discharge Curve

Constant Load	121 kΩ
Starting Drain	12,9 μA
Temperature	20°C

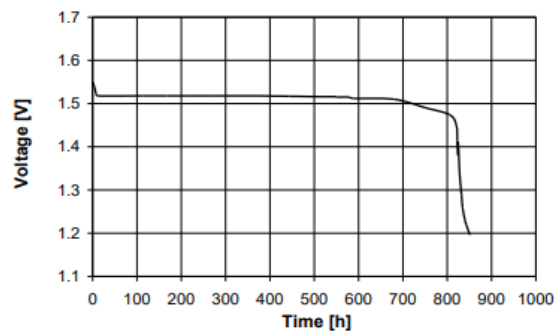

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 317MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

319 **0%**
MERCURY

SR527SW (SR64)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	21 mAh, Discharge over 47 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,29 g

Dimensions


(according IEC 60086-3)

Diameter	5,80 mm (0,228")
Height	2,70 mm (0,106")

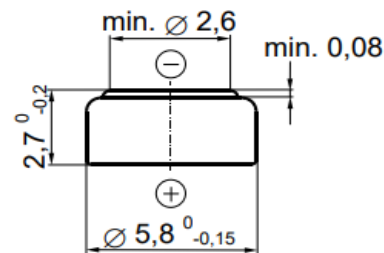

Discharge Curve

Constant Load	47,0 kΩ
Starting Drain	32,9 μA
Temperature	20°C

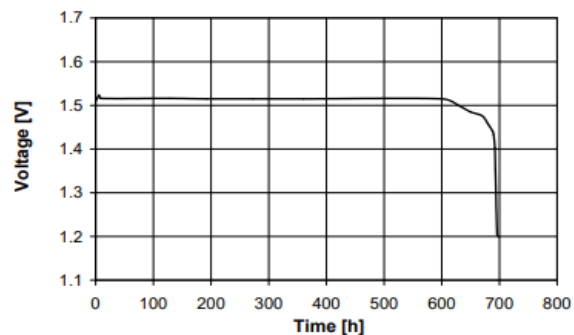

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 319MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

321 **0%**
MERCURY

SR616SW (SR65)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	14,5 mAh, Discharge over 68,1 k Ω at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,25 g

Dimensions


(according IEC 60086-3)

Diameter	6,80 mm (0,268")
Height	1,65 mm (0,065")

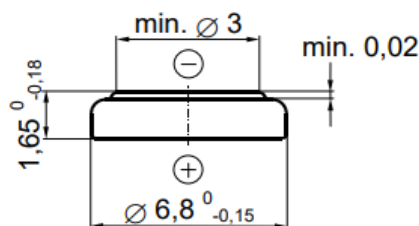

Discharge Curve

Constant Load	68,1 k Ω
Starting Drain	22,9 μ A
Temperature	20°C

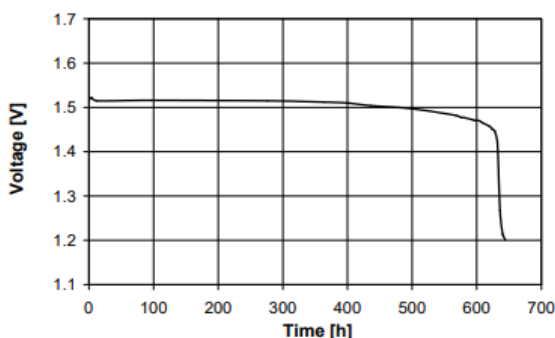

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 321MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

329 **0%**
MERCURY

SR731SW
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	37 mAh, Discharge over 25,5 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,58 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	3,10 mm (0,122")

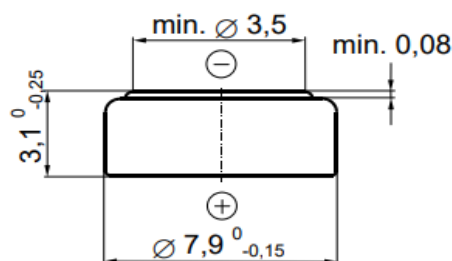

Discharge Curve

Constant Load	25,5 kΩ
Starting Drain	61,2 μA
Temperature	20°C

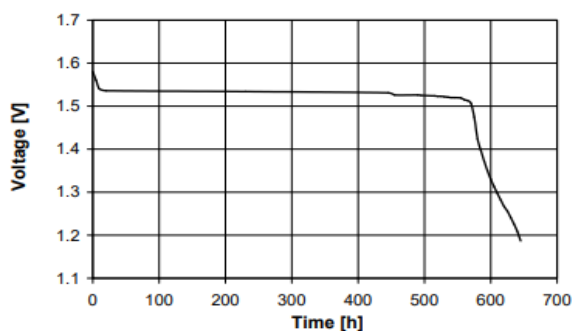

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 329MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

335 **0%**
MERCURY

SR512SW
Watch Battery OEM

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	6 mAh, Discharge over 82,5 kΩ at 23±3°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 7% per year at 23±3°C
Nominal Weight	~0,13 g

Dimensions


(according IEC 60086-3)

Diameter	5,80 mm (0,228")
Height	1,25 mm (0,049")

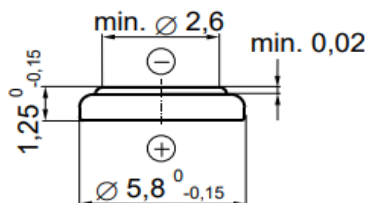

Discharge Curve

Constant Load	82,5 kΩ
Starting Drain	18,9 μA
Temperature	23±3°C

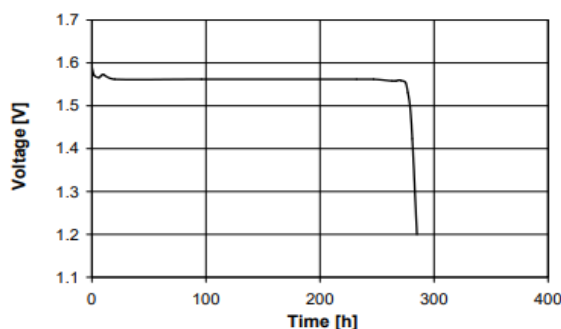

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 335MF_OEM.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

337 **0%**
MERCURY

SR416SW
Watch Battery OEM

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	8 mAh, Discharge over 56,2 kΩ at 23±3°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 7% per year at 23±3°C
Weight	~0,13 g

Dimensions


(according IEC 60086-3)

Diameter	4,80 mm (0,189")
Height	1,65 mm (0,065")

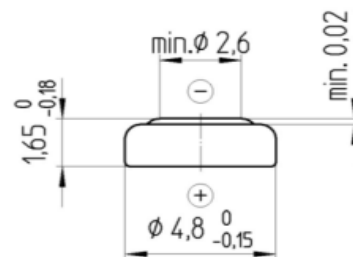

Discharge Curve

Constant Load	56,2 kΩ
Starting Drain	27,8 μA
Temperature	23±3°C

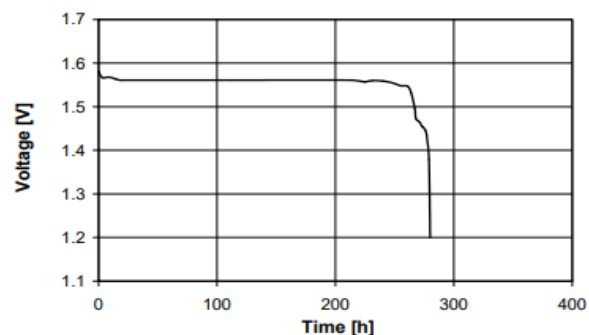

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 337MF_OEM.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

341 **0%**
MERCURY

SR714SW
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	15 mAh, Discharge over 68,1 k Ω at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,29 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	1,45 mm (0,057")

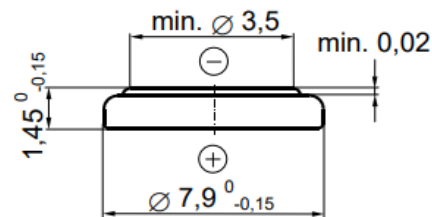

Discharge Curve

Constant Load	68,1 k Ω
Starting Drain	22,9 μ A
Temperature	20°C

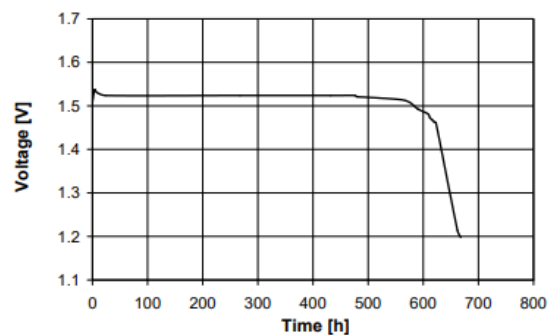

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 341MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

346 **0%**
MERCURY

SR712SW
Watch Battery OEM

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	9,5 mAh, Discharge over 47 kΩ at 23±3°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,24 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	1,25 mm (0,049")

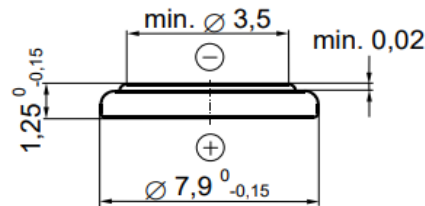

Discharge Curve

Constant Load	47 kΩ
Starting Drain	32.5 μA
Temperature	23±3°C

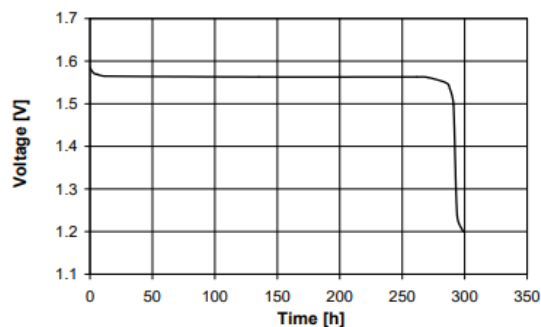

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 346MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

357 **0%**
MERCURY

SR1154W (SR44)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide - Manganese Dioxide, high drain
Nominal Voltage	1,55 V
Capacity	160 mAh, Discharge over 5,62 kΩ at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~1,96 g

Dimensions


(according IEC 60086-3)

Diameter	11,60 mm (0,457")
Height	5,40 mm (0,213")

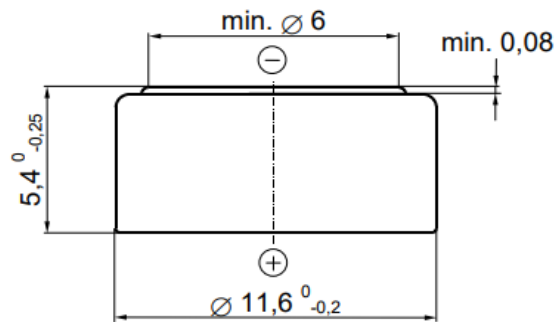

Discharge Curve

Constant Load	5,62 kΩ
Starting Drain	280 μA
Temperature	20°C

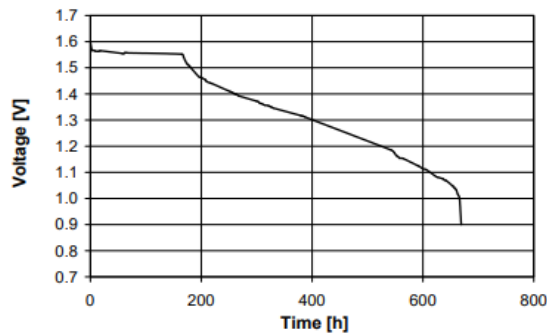

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 357SMF.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

362 **0%**
MERCURY
SR721SW (SR58)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	23 mAh, Discharge over 34.8 kΩ at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,39 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	2,10 mm (0,083")

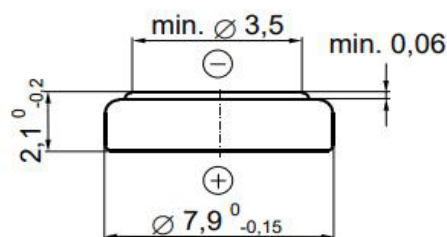

Discharge Curve

Constant Load	34.8 kΩ
Starting Drain	45 μA
Temperature	20°C

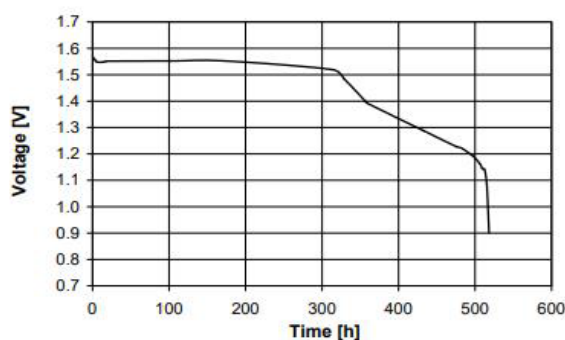

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 362MF.04 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

364 **0%**
MERCURY

SR621SW (SR60)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	19 mAh, Discharge over 47,0 kΩ at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,30 g

Dimensions


(according IEC 60086-3)

Diameter	6,80 mm (0,268")
Height	2,15 mm (0,085")

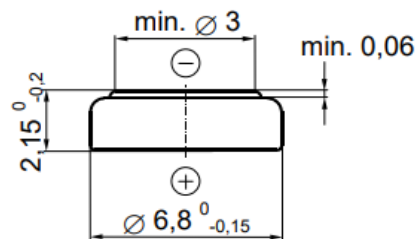

Discharge Curve

Constant Load	47,0 kΩ
Starting Drain	33 μA
Temperature	20°C

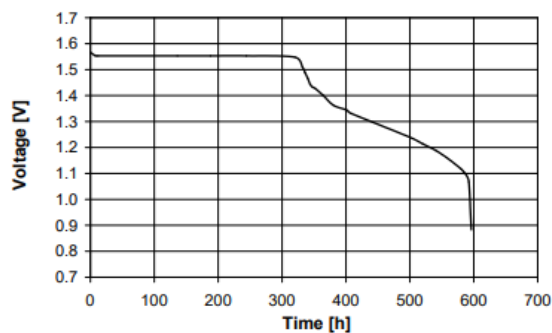

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 364MF.04 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

370 **0%**
MERCURY

SR920W (SR69)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	40 mAh, Discharge over 25,5 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,59 g

Dimensions


(according to IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	2,05 mm (0,081")

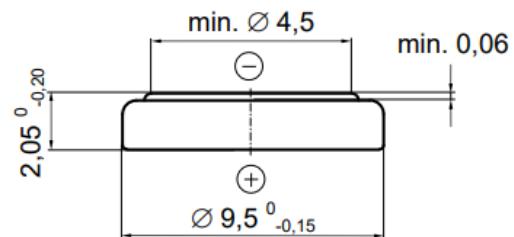

Discharge Curve

Constant Load	25,5 kΩ
Starting Drain	61,2 μA
Temperature	20°C

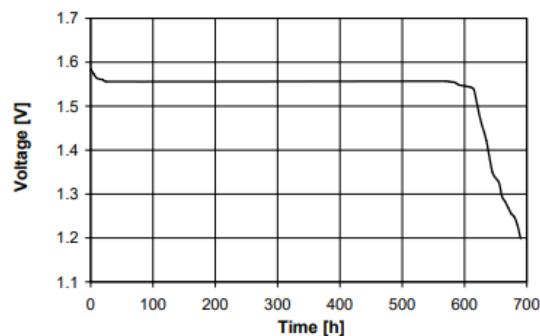

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 370MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

371 **0%**
MERCURY

SR920SW (SR69)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, Low Drain
Nominal Voltage	1,55 V
Capacity	35 mAh, Discharge over 25,5 k Ω at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,55 g

Dimensions


(according to IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	2,05 mm (0,081")

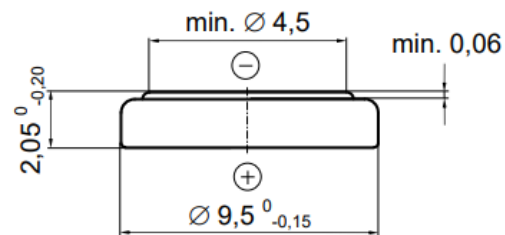

Discharge Curve

Constant Load	25,5 k Ω
Starting Drain	61.6 μ A
Temperature	20°C

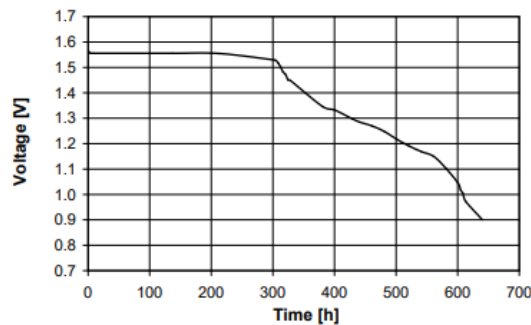

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 371MF.04 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

373 **0%**
MERCURY

SR916SW (SR68)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	29 mAh, Discharge over 34.8 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,5 g

Dimensions


(according IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	1,65 mm (0,065")

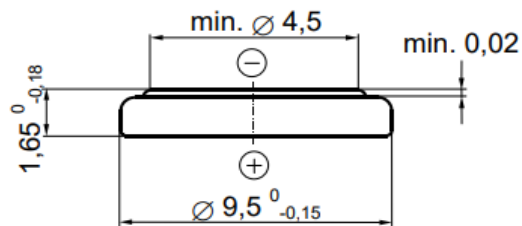

Discharge Curve

Constant Load	34,8 kΩ
Starting Drain	43,4 μA
Temperature	20°C

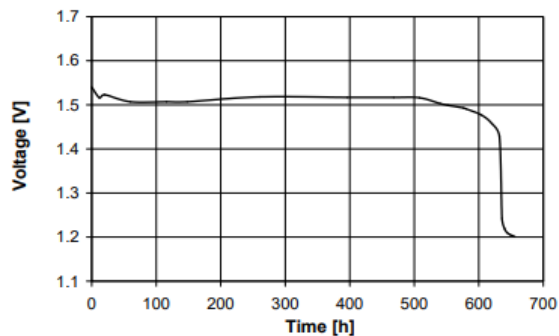

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 373MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

377 **0%**
MERCURY

SR626SW (SR66)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	24 mAh, Discharge over 34,8 k Ω at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,35 g

Dimensions


(according to IEC 60086-3)

Diameter	6,80 mm (0,268")
Height	2,60 mm (0,102")

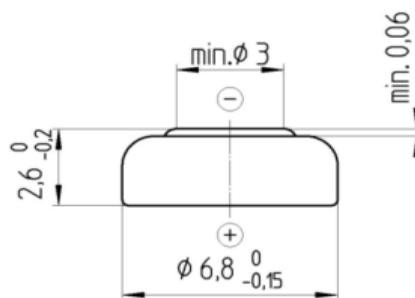

Discharge Curve

Constant Load	34,8 k Ω
Starting Drain	43,7 μ A
Temperature	20°C

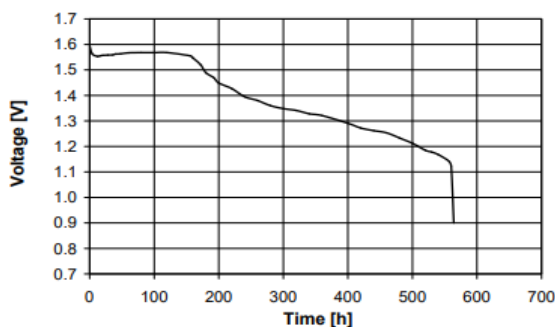

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 377MF.08 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

379 **0%**
MERCURY

SR521SW (SR63)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	16 mAh, Discharge over 47 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,23 g

Dimensions


(according IEC 60086-3)

Diameter	5,80 mm (0,228")
Height	2,15 mm (0,085")

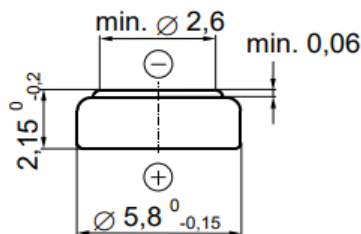

Discharge Curve

Constant Load	47 kΩ
Starting Drain	32,6 μA
Temperature	20°C

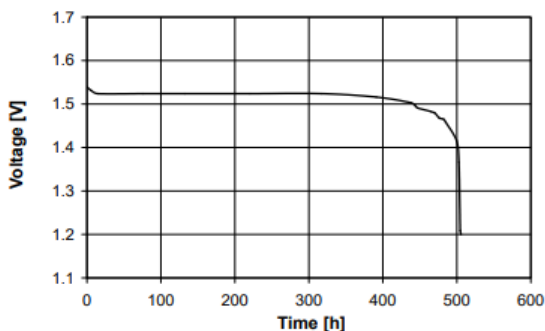

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 379MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

380 **0%**
MERCURY

SR936W
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	82 mAh, Discharge over 15 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~1,01 g

Dimensions


(according IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	3,60 mm (0,142")

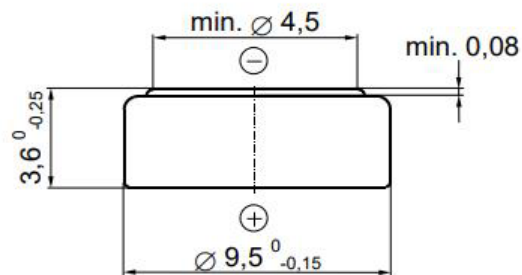

Discharge Curve

Constant Load	15 kΩ
Starting Drain	103 μA
Temperature	20°C

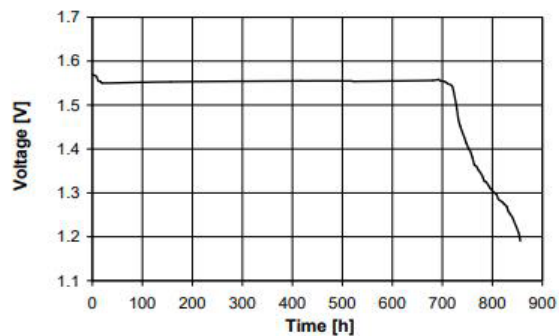

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 380MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

384 **0%**
MERCURY

SR736SW (SR41)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	45 mAh, Discharge over 18,2 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,66 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	3,60 mm (0,142")

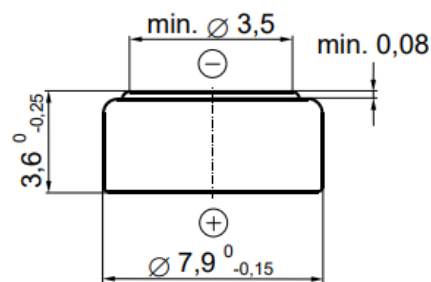

Discharge Curve

Constant Load	18,2 kΩ
Starting Drain	83,0 μ A
Temperature	20°C

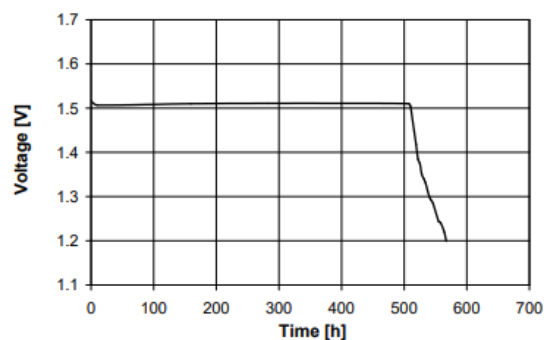

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 384MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

386 **0%**
MERCURY

SR1142W (SR43)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	130 mAh, Discharge over 6,81 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~1,67 g

Dimensions


(according IEC 60086-3)

Diameter	11,60 mm (0,457")
Height	4,20 mm (0,165")

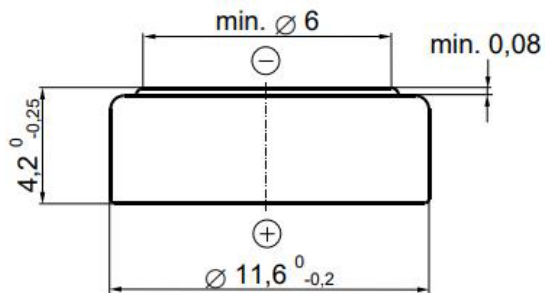

Discharge Curve

Constant Load	6,81 kΩ
Starting Drain	224,6 μA
Temperature	20°C

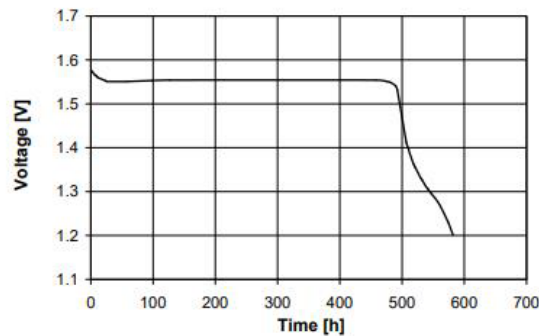

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 386MF_OEM.05 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

389 **0%**
MERCURY

SR1130W (SR54)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	80 mAh, Discharge over 15 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~1,25 g

Dimensions


(according IEC 60086-3)

Diameter	11,60 mm (0,457")
Height	3,05 mm (0,120")

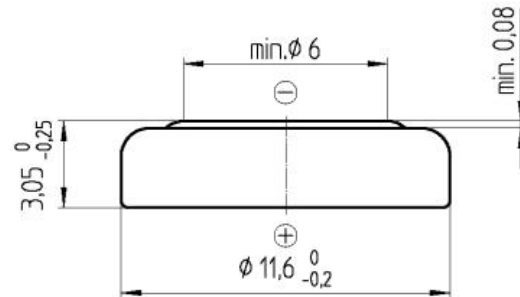

Discharge Curve

Constant Load	15 kΩ
Starting Drain	104 μA
Temperature	20°C

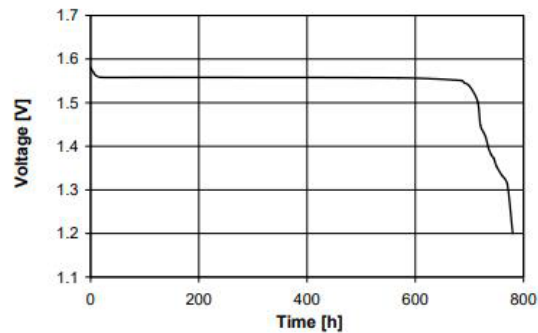

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 389MF_OEM.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

390 **0%**
MERCURY

SR1130SW
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	80 mAh, Discharge over 15 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~1,26 g

Dimensions


(according IEC 60086-3)

Diameter	11,60 mm (0,457")
Height	3,05 mm (0,120")

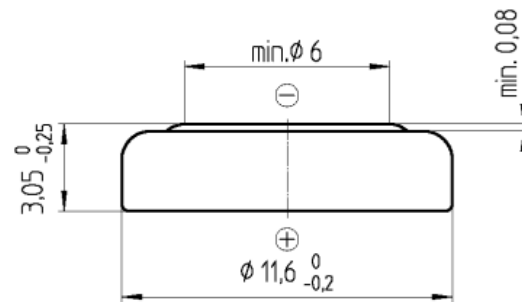

Discharge Curve

Constant Load	15 kΩ
Starting Drain	101 μA
Temperature	20°C

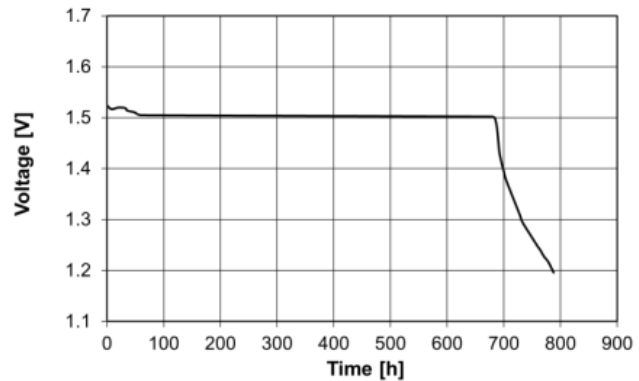

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 390MF_OEM.03 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

391 **0%**
MERCURY

SR1120W (SR55)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	50 mAh, Discharge over 18,2 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,87 g

Dimensions


(according IEC 60086-3)

Diameter	11,60 mm (0,457")
Height	2,05 mm (0,081")

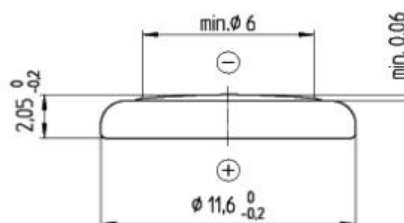

Discharge Curve

Constant Load	18,2 kΩ
Starting Drain	84,1 μA
Temperature	20°C

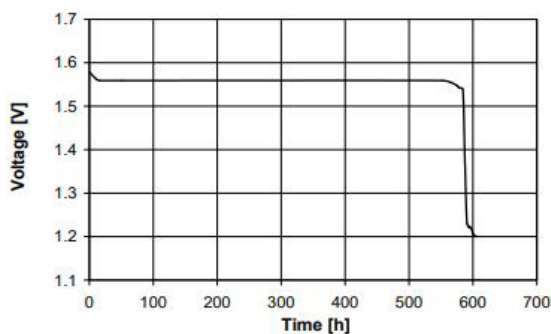

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 391MF_OEM.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

392 **0%**
MERCURY

SR736W (SR41)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	45 mAh, Discharge over 18,2 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,65 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	3,60 mm (0,142")

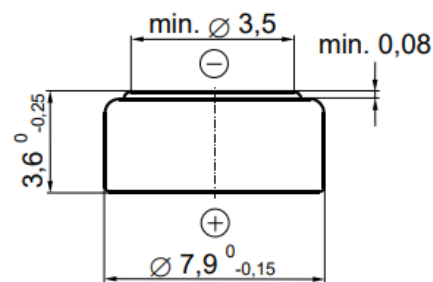

Discharge Curve

Constant Load	18,2 kΩ
Starting Drain	87,6 μA
Temperature	20°C

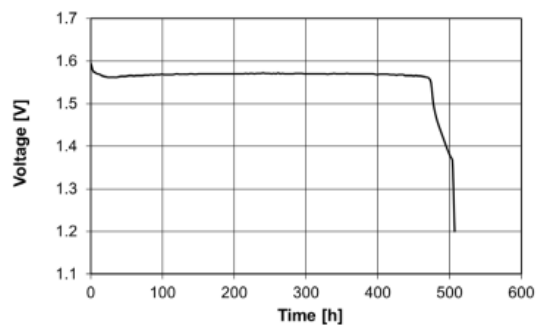

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 392MF_OEM.06 2020/06

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

393 **0%**
MERCURY

SR754W (SR48)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	80 mAh, Discharge over 15 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~1,09 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	5,40 mm (0,212")

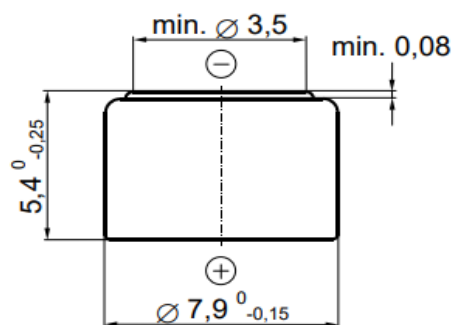

Discharge Curve

Constant Load	15 kΩ
Starting Drain	103,3 μA
Temperature	20°C

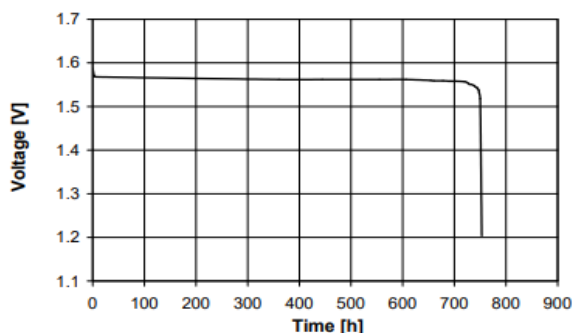

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 393MF.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

394 **0%**
MERCURY

SR936SW (SR936)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	80 mAh, Discharge over 10,0 kΩ at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,95 g

Dimensions


(according IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	3,60 mm (0,142")

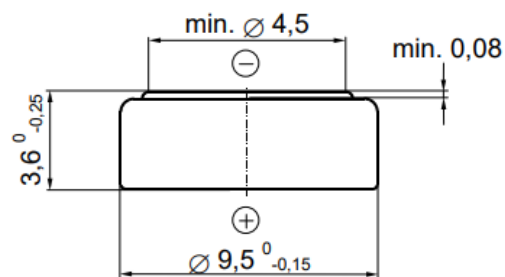

Discharge Curve

Constant Load	10,0 kΩ
Starting Drain	155 μA
Temperature	20°C

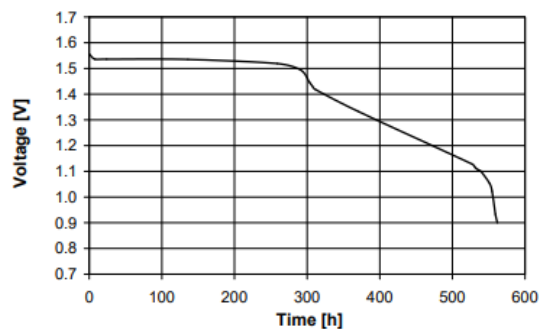

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 394MF.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

395 **0%**
MERCURY

SR927SW (SR57)
Watch Battery
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	55 mAh, Discharge over 18,2 kΩ at 20°C to 0,9 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,73 g

Dimensions


(according IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	2,70 mm (0,106")

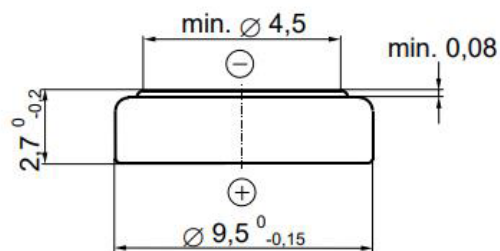

Discharge Curve

Constant Load	18,2 kΩ
Starting Drain	86 μA
Temperature	20°C

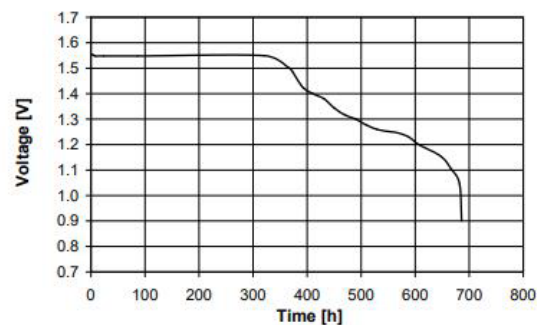

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 395MF.04 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

396 **0%**
MERCURY

SR726W (SR59)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	32 mAh, Discharge over 25,5 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,48 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,311")
Height	2,60 mm (0,102")

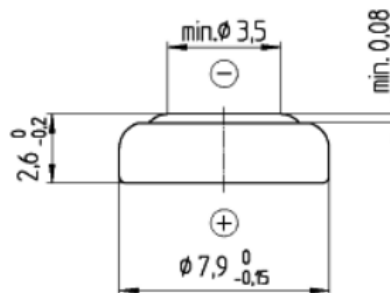

Discharge Curve

Constant Load	25,5 kΩ
Starting Drain	61,9 μA
Temperature	20°C

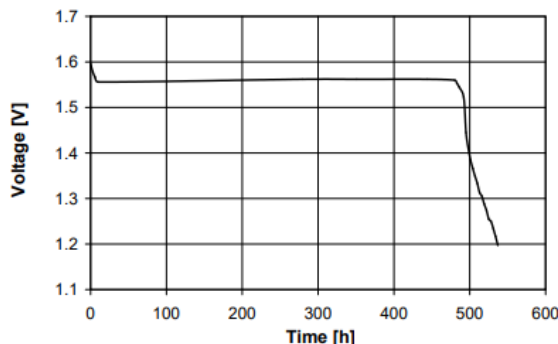

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 396MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

397 0%
MERCURY

SR726SW (SR59)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	32 mAh, Discharge over 25,5 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 5% per year at 20°C
Weight	~0,48 g

Dimensions


(according IEC 60086-3)

Diameter	7,90 mm (0,457")
Height	2,60 mm (0,102")

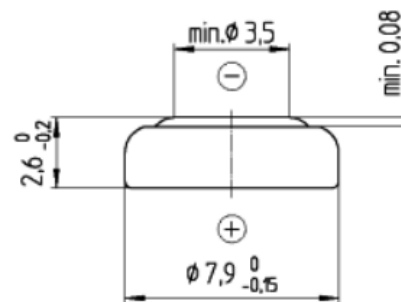

Discharge Curve

Constant Load	25,5 kΩ
Starting Drain	60,7 μA
Temperature	20°C

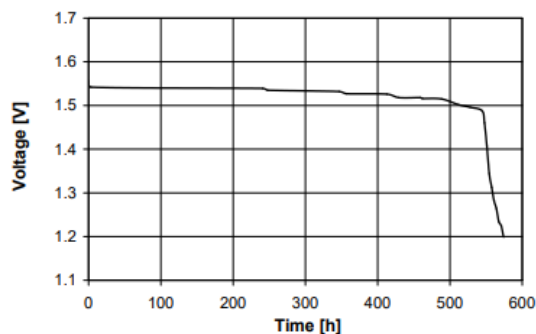

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 397MF_OEM.07 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

399 **0%**
MERCURY

SR927W (SR57)
Watch Battery OEM
Swiss Made

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, high drain
Nominal Voltage	1,55 V
Capacity	55 mAh, Discharge over 15 kΩ at 20°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 10% per year at 20°C
Weight	~0,77 g

Dimensions


(according IEC 60086-3)

Diameter	9,50 mm (0,374")
Height	2,70 mm (0,106")

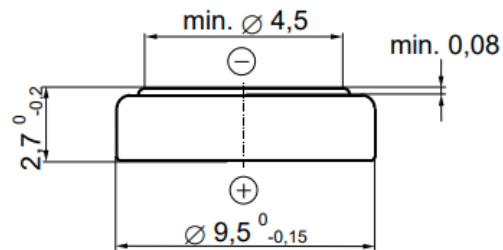

Discharge Curve

Constant Load	15 kΩ
Starting Drain	105,9 μA
Temperature	20°C

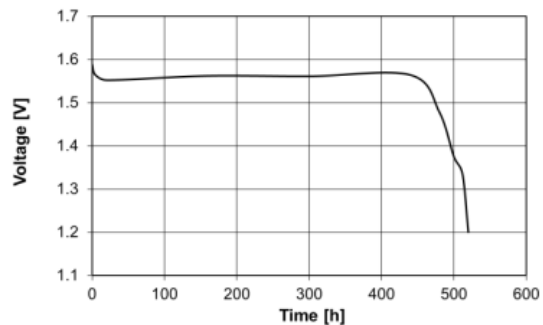

*Condensing humidity not allowed

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. 399MF_OEM.06 2019/08

Renata SA
CH-4452 Itingen/Switzerland

Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95

sales@renata.com
www.renata.com

A COMPANY OF THE **SWATCH GROUP**

renata 
batteries

www.renata.net.ar

Distribuidores } ☎ +54 9 11 5421-1128 Mayoristas } ☎ +54 9 11 6664-4596

www.weinger.com.ar